

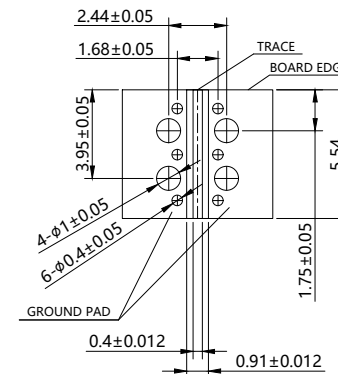



Revisions			
REV:	Description	Date	Approval
A.0			

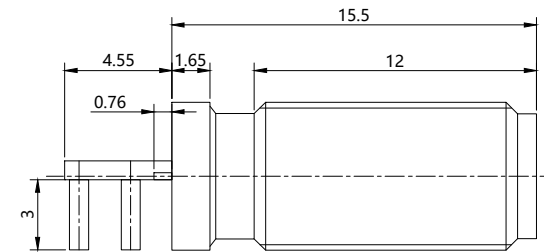

MOUNTING FOOTPRINT

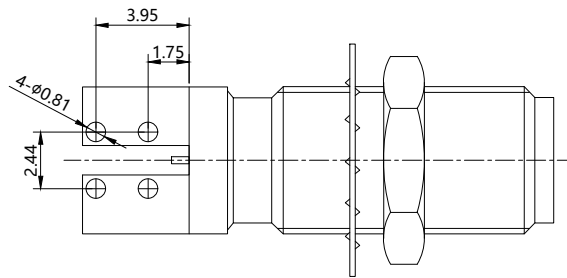

Electrical parameters:

- 1 Impedance: 50Ω
- 2 Frequency: DC~26.5 GHz
- 3 VSWR: ≤ 1.38
- 4 Dielectric withstand voltage: 1000Vrms
- 5 Insulation resistance: 5000M Ω

			General tolerance Unless Otherwise Specified		0 Places;±0.2		4 Places;±0.2		E-REON B.V. /The Netherlands				
					1 Places;±0.2		Angles;						
					2 Places;±0.2		Product:						
					3 Places;±0.2								
Dielectric	PTFE	NA	Maker	Marcus	Date	2021/07/05		Drawing Number		DPF-FF-DHERM			
Outer conductor	Brass	Gold	Review		Date			Description		SMA Female END LAUNCH, PCB MOUNT			
Center conductor	Brass	Gold	Approved		Date								
Description	Material	Plating			Scale:1:5:1	Unit:		mm	RVE	A.0	Page	1 OF 1	

0 Places; ± 0.2	4 Places; ± 0.2
1 Places; ± 0.2	Angles;
2 Places; ± 0.2	Product:
3 Places; ± 0.2	

	E-REON B.V. /The Netherlands
--	-------------------------------------